


200 to 500kW



Heat Exchanger

AVPL Condensers are manufacture with Industrial heat exchangers for long life and low life cycle cost. Compact geometry design delivers large capacity in less space. Available in modules of 125kW and other capacities on request. Coil with corrosion protection coating is optional.

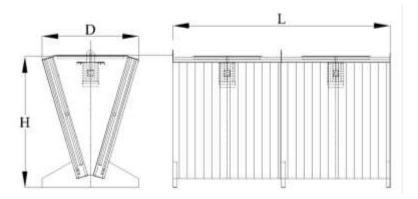

Fans

Corrosion free blades gives high air flow suitable for high ambient conditions. Efficient, continuous duty motor with IP protection and class F insulation for 415V, 50hZ power supply.

Casing

Powder coated steel casing for outdoor use with large support base. Inlet and outlet connection in copper for easy installation, removable parts for easy maintenance.

Model GC-V	Capacity#,	Air flow,	Fans x Power	LxDxH, mm	Empty
	kW	m3/hr	N x kW		weight, kG
60104 W281P6	250	48,400	2 x 1.5	2.8 x 1.2 x 1.7	510
60156 W381P6	370	72,600	4 x 1.5	4.9 x 1.2 x 1.7	815
60192 W481P6	505	96,800	4 x 1.5	4.9 x 1.2 x 1.7	815

Capacity at 15TD, R404a